

# purecold

## ICON 6

(10S7LA1) (10S7MA1)

Self-Contained, Slide-Out Bottom Mount

Low & Medium Temperature

Doored Merchandiser



### ICON6 (10S7MA1) Medium Temperature Application

Case Length	61.5"(2dr)	92.5"(3dr)	123"(4dr)
-------------	------------	------------	-----------

#### Physical Data

Total Display Area in ft <sup>2</sup>	21.74	32.61	43.48
Refrigerated Volume in ft <sup>3</sup>	45.8	68.9	91.6
Shelf Depth <i>max</i>	21 5/8"	21 5/8"	21 5/8"

#### Electrical Data (115V 60Hz)


Case Load	4.7	7.6	8.0
-----------	-----	-----	-----

#### Electrical Data (208V 60Hz)

Condensing Unit	4.8	6.8	8.8
MOCP (per phase) Amps	10	20	20

#### Energy Data

THR in BTU/HR instantaneous	2797	3923	5118
THR in BTU/HR average	750	1091	1438
Net Environmental Heating Effect in BTU/HR	675	982	1294

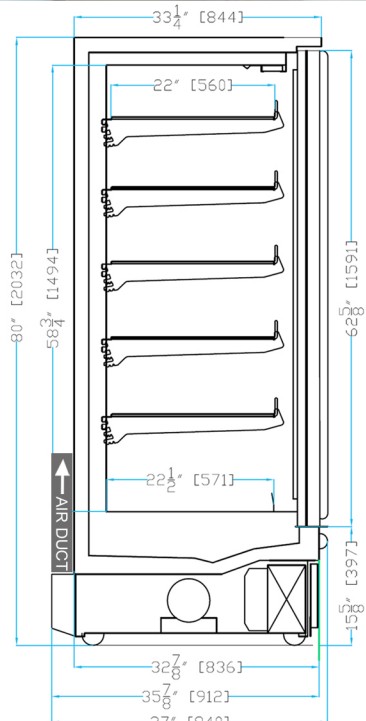

### ICON6 (10S7LA1) Low Temperature Application

Case Length	61.5"(2dr)	92.5"(3dr)	123"(4dr)
-------------	------------	------------	-----------

#### Physical Data

Total Display Area in ft <sup>2</sup>	21.74	32.61	43.48
Refrigerated Volume in ft <sup>3</sup>	35.66	52.97	71.32
Shelf Depth <i>max</i>	21 5/8"	21 5/8"	21 5/8"

#### Electrical Data (115V 60Hz)




Case Load	8.5	13	15.5
-----------	-----	----	------

#### Electrical Data (208V 60Hz)

Condensing Unit / Defrost	8.0	14.0	17.5
MOCP (per phase) Amps	15	20	30

#### Energy Data

THR in BTU/HR instantaneous	5459	8359	10782
THR in BTU/hr average	3412	5459	5800
Net Environmental Heating Effect (BTU/hr)	989	1484	1618

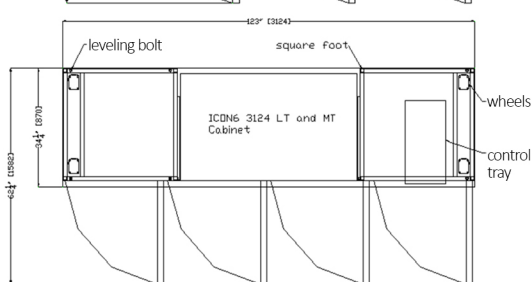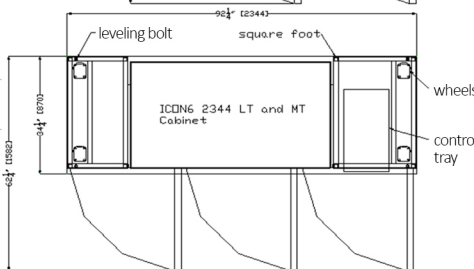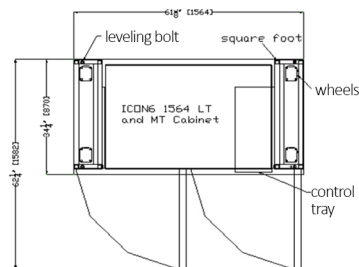

### ICON6 Power Information 208V-1P (NEMA) 4 Wire ( 2-hots-1 neutral-1 ground)



#### features

- No drains, no pipework. plug and play!
- Low energy and heat rejection values
- Fixtures have similar pack-out as remote application
- Recessed wheels and leveling bolts
- Self-evaporative drain pan
- Condensing unit on pull out tray
- Single electrical connection (NEMA Twist Lock)
- 30" Glass Doors
- Fits through 38" Standard Opening
- 2-3-4 Door Options
- Refrigerant: R448a
- Lighting: LED Mullion Lighting
- Shelving: 5 - 22"
- Ticket Rail: 1 1/4"




Conforming to UL471 & NSF7  
DOE 2017 Compliant



www.prohvacr.com

# purecold<sup>®</sup> ICON Lineup Planning Guide

Lineup Breakout

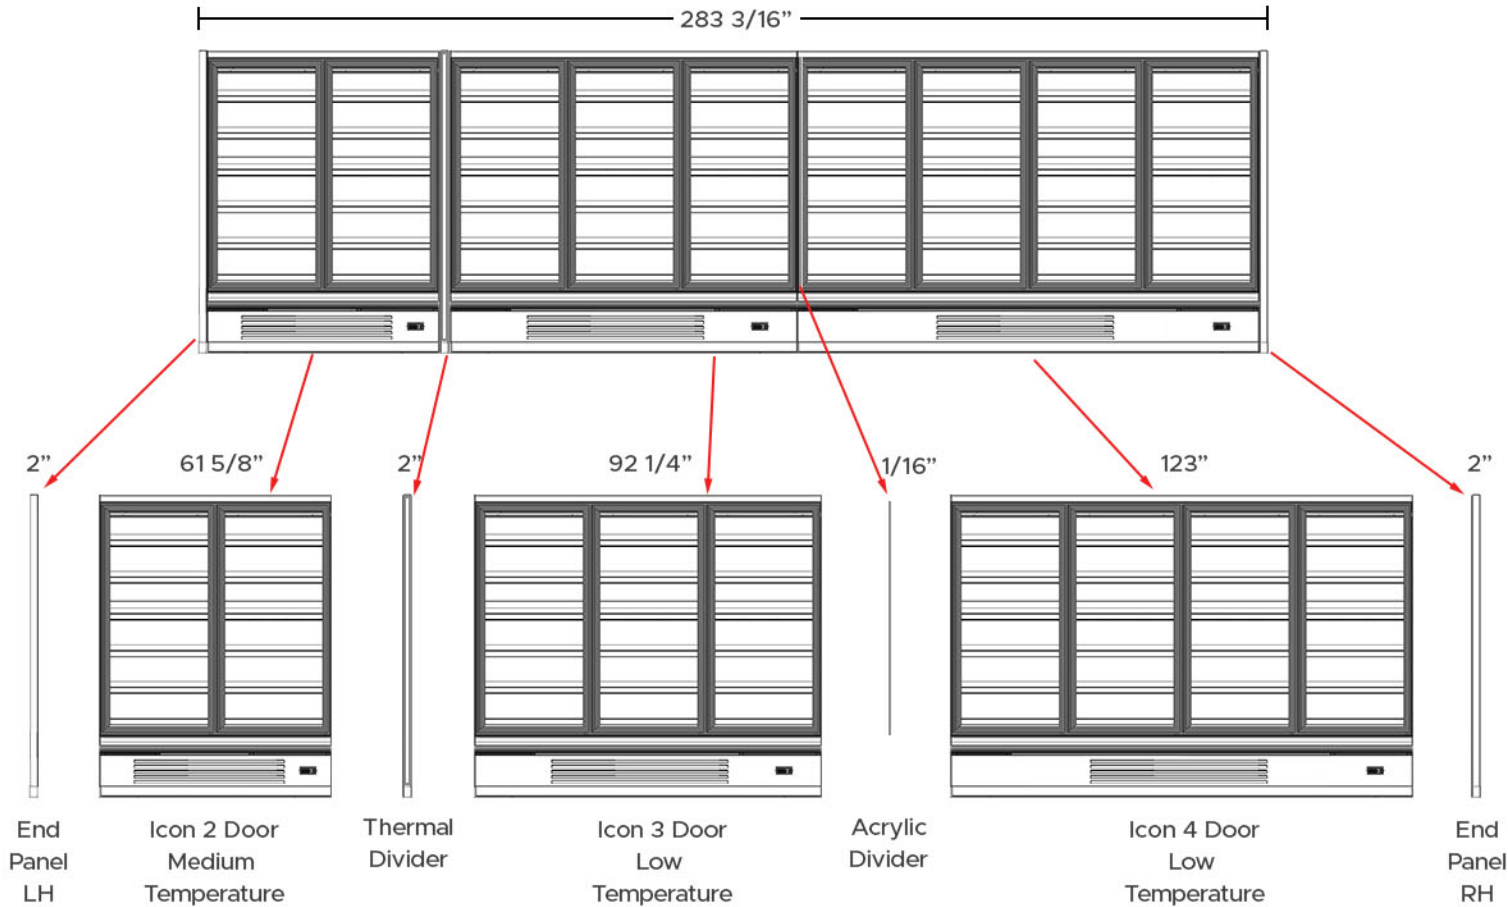

## Lineup Tips

- All fixtures (2-3-4 Door Models) fully assembled are 39" total front to back.
- All lineups regardless of length require Left Hand & Right Hand End Panels
- Thermal Dividers are required between Medium and Low Temperature fixtures when placed adjacent in the lineup.
- Acrylic Dividers are required between "like temperature" fixtures for air separation control.